

2026
AM

XFUSION

Table of Contents

FORKS

SLANT	02
SWEEP Boost	04
SLIDE Boost	05
REZZA 29 Boost	06
TRACE 36	09
VENGEANCE 38	10
RV1 29 DH	13

SHOCKS

REZZA	15
O2 PRO R/RLX/RL/RLR	16-17
H3A	18
H3C	21

SEAT POSTS

Manic TA LC	22
Manic TA	23
Manic Gravel	24

Spec Chart	26-28
REMOTE SPEC.	29
Distributor and Service center	30

Product Use Chart

	GRAVEL	XC	TRAIL	ALL MOUNTAIN	FREERIDE	DH
26 INCH			SLANT			
27.5 INCH			SWEEP Boost			
29 INCH		REZZA 29 Boost	SLIDE Boost			
			TRACE 36			
			VENGEANCE 38			
					RV1_38mm	
REAR SHOCKS		REZZA	O2 PRO			
				H3C		
				H3A		
	GRAVEL	XC	TRAIL	ALL MOUNTAIN	FREERIDE	DH
POSTS	Manic Gravel					
			Manic TA LC			
			Manic TA			

Brake Size Chart

	STANDARD	MAX
REZZA 29 Boost SLANT SWEEP Boost SLIDE Boost TRACE 36	180 post mount	203mm
VENGEANCE 38 RV1_38mm	180 post mount 203 post mount	220mm

XFUSION Mission

Since 1999, XFUSION has obsessively focused on producing the highest performance, highest quality and highest value suspension products for mountain bikes.


All new Finecut HLR damper

XFusion's Finecut HLR sets a new standard in suspension performance, combining cutting-edge technology with rider-proven results. Designed to deliver unmatched control, stability, and small bump compliance, the Finecut HLR has been rigorously tested by XFusion athletes throughout the 2024 season.

The new Finecut HLR features a larger damper tube, allowing for a bigger piston and increased piston flow. This advanced design enhances damping force, resulting in exceptional small bump sensitivity and improved overall damper stability. At its core is a revolutionary floating piston system, which balances internal pressure, reduces oil aeration, and ensures a smooth, consistent damping curve. Additionally, the sealed cartridge system has been carried over, providing quick and efficient serviceability to keep riders on the trails.

Optimized for Precision: High-speed and low-speed compression adjustments provide meaningful tuning with every click, while the refined rebound circuit offers a wider tuning range for greater control.

Uncompromising Stability: Improved oil flow dynamics and reduced cavitation deliver fade-free damping in the most demanding conditions.

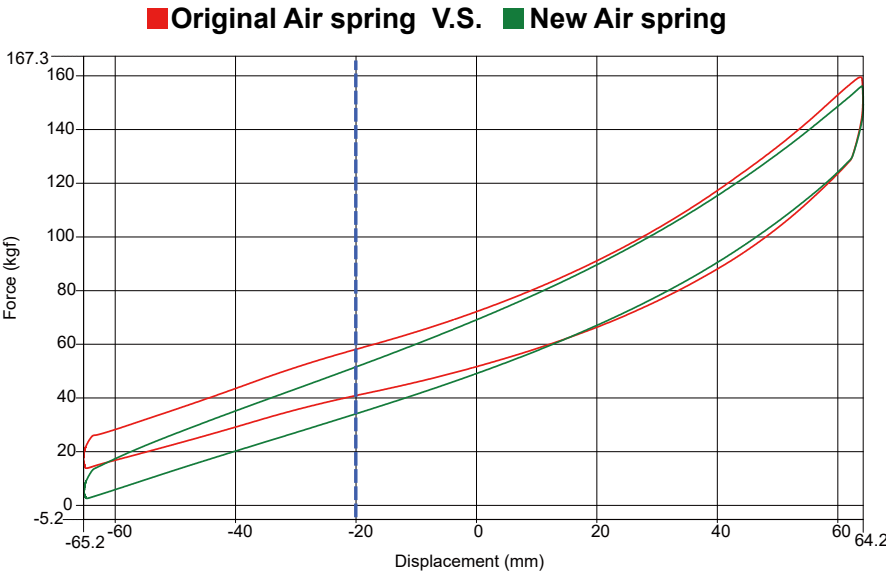

More sensitive at the first stage.





SLANT Series *For DJ bike and KID bike*

34mm Stanchion Tube 26 Inch Wheel Fork Up To 160mm of Travel

Slant RC	Weight	4.2 pounds / 1900 grams
	Wheel Size	26 inch
	Travel	120mm, 140mm, 160mm
	Stanchion	34mm Ano aluminum
	Spring	Air
	Damper	RC Damper
	Adjustments	Compression(open to firm), Rebound, Air spring
	Steerer	Taper Standard
	Axle	Lock-X 15mm
	Options	RC Remote
	Offset	40mm
	Standard Colors	Matte Black, Gloss Black

Kid bike
tune for
26 & 24
kid bike

Slant Roughcut HLR	Weight	4.2 pounds / 1900 grams
	Wheel Size	26 inch
	Travel	120mm, 140mm, 160mm
	Stanchion	34mm Ano aluminum
	Spring	Air
	Damper	Roughcut HLR
	Adjustments	HS comp, LS comp, Rebound, Air spring
	Steerer	Taper Standard
	Axle	Lock-X 15mm
	Offset	40mm
	Standard Colors	Matte Black, Gloss Black

Slant Roughcut RCP	Weight	4.2 pounds / 1900 grams
	Wheel Size	26 inch
	Travel	120mm, 140mm, 160mm
	Stanchion	34mm Ano aluminum
	Spring	Air
	Damper	Roughcut RCP
	Adjustments	Three position platform, LS comp, Rebound, Air spring
	Steerer	Taper Standard
	Axle	Lock-X 15mm
	Offset	40mm
	Standard Colors	Matte Black, Gloss Black

***SWEEP** Series*

34mm Stanchion Tube 27.5 Inch Wheel Fork Up To 160mm of Travel



Sweep RC	Weight	4.4 pounds / 2000 grams
	Wheel Size	27.5 inch
	Travel	120mm, 140mm, 160mm
	Stanchion	34mm Ano aluminum
	Spring	Air
	Damper	RC Damper
	Adjustments	Compression(open to firm), Rebound, Air spring
	Steerer	Taper Standard
	Axle	Thru Axle 110x15mm Boost
	Offset	46mm
	Options	RC Remote

Sweep Roughcut HLR	Weight	4.4 pounds / 2000 grams
	Wheel Size	27.5 inch
	Travel	120mm, 140mm, 160mm
	Stanchion	34mm Ano aluminum
	Spring	Air
	Damper	Roughcut HLR
	Adjustments	HS comp, LS comp, Rebound, Air spring
	Steerer	Taper Standard
	Axle	Thru Axle 110x15mm Boost
	Offset	46mm

Sweep Roughcut RCP	Weight	4.4 pounds / 2000 grams
	Wheel Size	27.5 inch
	Travel	120mm, 140mm, 160mm
	Stanchion	34mm Ano aluminum
	Spring	Air
	Damper	Roughcut RCP
	Adjustments	Three position platform, LS comp, Rebound, Air spring
	Steerer	Taper Standard
	Axle	Thru Axle 110x15mm Boost
	Offset	46mm



***SLIDE** Series*

34mm Stanchion Tube 29 Inch Wheel Fork Up To 140mm of Travel



Slide RC	Weight	4.4 pounds / 2000 grams
	Wheel Size	29 inch
	Travel	100mm, 120mm, 140mm
	Stanchion	34mm Ano aluminum
	Spring	Air
	Damper	RC Damper
	Adjustments	Compression(open to firm), Rebound, Air spring
	Steerer	Taper Standard
	Axle	Thru Axle 110x15mm Boost
	Offset	51mm & 44mm
	Options	RC Remote

Slide Roughcut HLR	Weight	4.4 pounds / 2000 grams
	Wheel Size	29 inch
	Travel	100mm, 120mm, 140mm
	Stanchion	34mm Ano aluminum
	Spring	Air
	Damper	Roughcut HLR
	Adjustments	HS comp, LS comp, Rebound, Air spring
	Steerer	Taper Standard
	Axle	Thru Axle 110x15mm Boost
	Offset	51mm & 44mm

Slide Roughcut RCP	Weight	4.4 pounds / 2000 grams
	Wheel Size	29 inch
	Travel	100mm, 120mm, 140mm
	Stanchion	34mm Ano aluminum
	Spring	Air
	Damper	Roughcut RCP
	Adjustments	Three position platform, LS comp, Rebound, Air spring
	Steerer	Taper Standard
	Axle	Thru Axle 110x15mm Boost
	Offset	51mm & 44mm

REZZA Series

NEW FOR MY27

34mm Stanchion Tube 29 Inch Wheel Fork Up To 120mm of Travel



**REZZA
Finecut RL2**

Weight	1520 grams
Wheel Size	29 inch
Travel	100mm~120mm
Stanchion	34mm
Spring	Air
Damper	Finecut Damper
Adjustments	2 Position/RL
Steerer	1.5" Tapered
Axle	Thru Axle 110x15mm Boost
Offset	44mm
Standard Colors	Matte Black, Gloss Black

**REZZA
Finecut RCP**

Weight	1520 grams
Wheel Size	29 inch
Travel	100mm~120mm
Stanchion	34mm
Spring	Air
Damper	Finecut Damper
Adjustments	Three position platform, LS Rebound
Steerer	1.5" Tapered
Axle	Thru Axle 110x15mm Boost
Offset	44mm
Standard Colors	Matte Black, Gloss Black



**REZZA
Finecut RLR**

Weight	1520 grams
Wheel Size	29 inch
Travel	100mm~120mm
Stanchion	34mm
Spring	Air
Damper	Finecut Damper
Adjustments	2 Position/RL
Steerer	1.5" Tapered
Axle	Thru Axle 110x15mm Boost
Options	Q Flip 2
Offset	44mm
Standard Colors	Matte Black, Gloss Black

**REZZA
Finecut RCPR**

Weight	1520 grams
Wheel Size	29 inch
Travel	100mm~120mm
Stanchion	34mm
Spring	Air
Damper	Finecut Damper
Adjustments	Three position platform, LS Rebound
Steerer	1.5" Tapered
Axle	Thru Axle 110x15mm Boost
Options	Q Flip 2
Offset	44mm
Standard Colors	Matte Black, Gloss Black



Q Flip 2 Remote





TRACE 36 Series

36mm Stanchion Tube 29 Inch Wheel Fork Up To 170mm of Travel



Trace 36 RC

Weight 4.4 pounds / 2000 grams
 Wheel Size 29 inch
 Travel 140mm, 160mm, 170mm
 Stanchion 36mm Ano aluminum
 Spring Coil(Soft, Standard, Firm), Air spring
 Damper RC Damper
 Adjustments Compression(Open to Firm), Rebound, Air spring or Preload spring
 Steerer Taper Standard
 Axle Thru Axle 110x15mm Boost
 Offset 51mm & 44mm
 Options RC Remote

Trace 36 Roughcut HLR

Weight 4.4 pounds / 2000 grams
 Wheel Size 29 inch
 Travel 140mm, 160mm, 170mm
 Stanchion 36mm Ano aluminum
 Spring Coil(Soft, Standard, Firm), Air spring
 Damper Roughcut HLR
 Adjustments HS comp, LS comp, Rebound, Air spring or Preload spring
 Steerer Taper Standard
 Axle Thru Axle 110x15mm Boost
 Offset 51mm & 44mm

Trace 36 Roughcut RCP

Weight 5.3 pounds / 2400 grams
 Wheel Size 29 inch
 Travel 140mm, 160mm, 170mm
 Stanchion 36mm Ano aluminum
 Spring Coil(Soft, Standard, Firm), Air spring
 Damper Roughcut RCP
 Adjustments 3 Positions platform, LS comp, Rebound, Air spring or Preload spring
 Steerer Taper Standard
 Axle Thru Axle 110x15mm Boost
 Offset 51mm & 44mm

*Second Back Up Spring For Bottom Out Control
 *10mm Travel Adjustment

10

FORKS



VENGEANCE Series

NEW FOR MY27

38mm Stanchion Tube 29 Inch Wheel Fork Up To 180mm of Travel



VENGEANCE 38 Finecut HLR

Weight	2460 grams
Wheel Size	29 inch
Travel	160mm, 170mm, 180mm
Stanchion	38mm Anodized aluminum
Spring	Air
Damper	Finecut HLR
Adjustments	HS comp, LS comp, Rebound, Air spring
Steerer	Taper Standard
Axle	Thru Axle 110x15mm Boost
Offset	51mm & 44mm



11

FORKS



12 FORKS



RV1 29 DH NEW FOR MY27 *Series*

38mm Stanchion Tube 29 Inch Wheel Fork Up To 200mm of Travel



RV1 38mm Finecut HLR	Weight	2950 grams
	Wheel Size	29 inch
	Travel	200mm
	Stanchion	38mm Ano aluminum
	Spring	Air
	Damper	Finecut HLR
	Adjustments	HS comp, LS comp, Rebound, Air spring
	Steerer	1-1/8th
	Axle	Thru Axle 110x20mm Boost
	Offset	56mm & 46mm



13 FORKS

XFUSION

REZZA Shock

Lightweight Precision for XC Performance


The all-new Rezza redefines XC suspension with cutting-edge technology and a lightweight design that is 10% lighter than our O2 PRO. It delivers the perfect balance of efficiency, support, and control for cross-country riders who demand the best.

Designed with a completely new damper system, the Rezza provides greater support in the final stroke, keeping you stable and composed on technical descents while maintaining efficiency on climbs. A larger negative air chamber improves small-bump sensitivity for a smoother ride, while the new adjustable negative volume spacer allows riders to fine-tune sag position to match their riding style.


Available in metric and trunnion sizing, the Rezza comes in multiple configurations to suit every rider’s needs. Choose from:

- RL – Rebound & Lockout
- RLX – Rebound & 3-Position Compression
- RLR – Rebound, Lockout & Lock with a new remote system
- RLXR – Rebound, 3-Position Compression & Lockout with a new remote system

With a sleek new design and refined damping performance, the Rezza is built for XC riders who expect more from their suspension. Whether charging to the finish line or pushing limits on the trail, this shock is ready to perform.

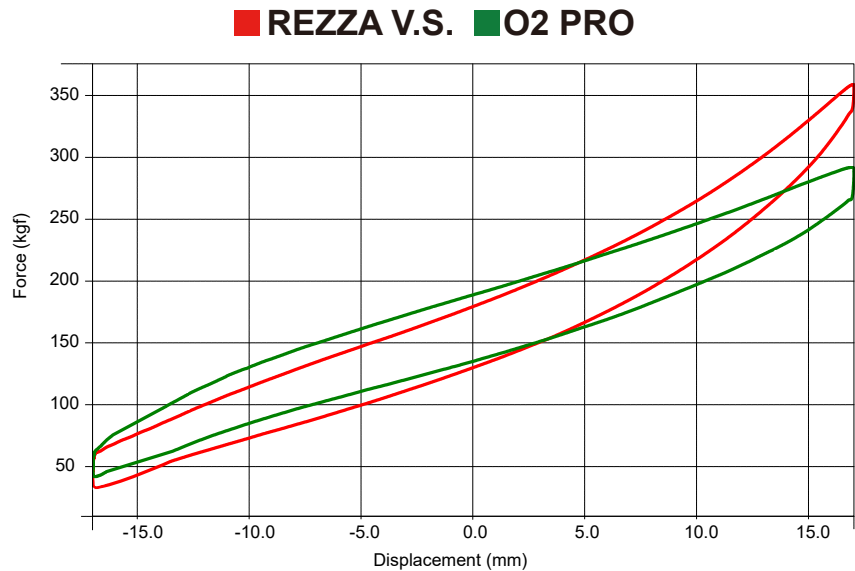

Greater support in the final stroke.

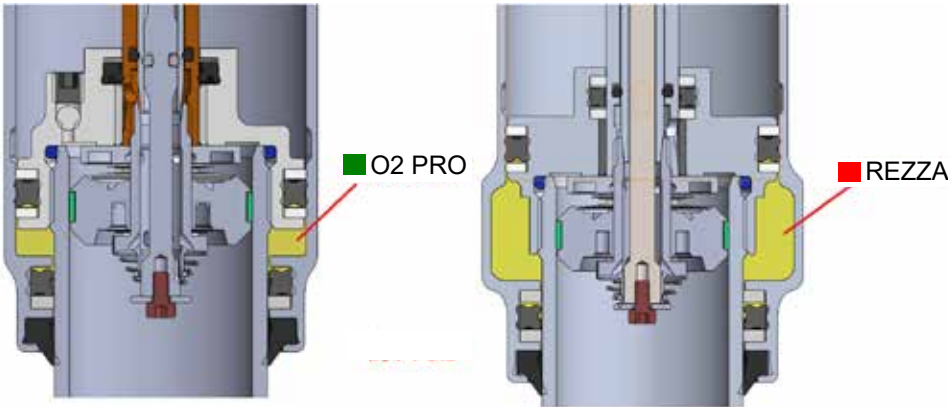

REZZA

Series

NEW FOR MY27

High-Performance XC Air Shock



REZZA RL	Weight	250 grams
	Spring	Air
	Adjustments	Rebound, Lockout, Air pressure
	Sizes	Metric and Trunnion
	Options	Polymer Hardware
REZZA RLX	Weight	250 grams
	Spring	Air
	Adjustments	3 Pos Comp Adjust, Rebound , Air pressure
	Sizes	Metric and Trunnion
	Options	Polymer Hardware
REZZA RLR	Weight	250 grams
	Spring	Air
	Adjustments	Q Flip Remote Lockout , Rebound , Air pressure
	Sizes	Metric and Trunnion
	Options	Polymer Hardware
REZZA RLXR	Weight	250 grams
	Spring	Air
	Adjustments	Q Flip Remote 3-Pos Comp Adjust, Rebound , Air pressure
	Sizes	Metric and Trunnion
	Options	Polymer Hardware



Q Flip 2 Remote



02 PRO Series

High-Performance All CNC-Machined Aluminum Air Shock



02 Pro R

Weight	265 grams
Spring	Air
Adjustments	Rebound, Air pressure
Sizes	All Standard, Metric and Trunnion
Options	AV Air Sleeve, Polymer Hardware

02 Pro RL

Weight	265 grams
Spring	Air
Adjustments	Lockout, Rebound, Air pressure
Sizes	All Standard, Metric and Trunnion
Options	AV Air Sleeve, Polymer Hardware

02 Pro RLX

Weight	265 grams
Spring	Air
Adjustments	3 Pos. Comp Adjust, Rebound, Air pressure
Sizes	All Standard, Metric and Trunnion
Options	AV Air Sleeve, Polymer Hardware



02 Pro RLR

Weight	265 grams
Spring	Air
Adjustments	Q Flip Remote Lockout , Rebound , Air pressure
Sizes	All Standard, Metric and Trunnion
Options	AV Air Sleeve, Polymer Hardware



Q Flip Remote



18

SHOCKS



H3A RCP

Weight 515 grams
 Spring Air
 Adjustments 3 positions platform, Low speed, Rebound
 Sizes Metric, Trunnion
 Options Polymer Hardware

H3A Series

New piggyback Air shock, 3 positions platform, low speed, rebound

H3A HLR

Weight 545 grams
 Spring Air
 Adjustments HS comp, LS comp, Rebound
 Sizes Metric, Trunnion
 Options Polymer Hardware



19

SHOCKS



20

SHOCKS



H3C Series

New piggyback Coil shock, Three positions platform, low speed, rebound



H3C HLR

Weight 350 grams(w/o spring)
Spring Coil
Adjustments HS comp, LS comp, Rebound
Sizes Metric & Trunnion
Options Polymer Hardware

H3C RCP

Weight 318 grams(w/o spring)
Spring Coil
Adjustments Three positions platform, Low speed, Rebound
Sizes Metric, Trunnion
Options Polymer Hardware



21

SHOCKS

22

SEAT POSTS

MANIC TA LC Series

NEW FOR MY27

Full range dropper seat posts line with internal routing



100mm Travel Weight Sizes Note
100mm
497 grams(30.9mm)
30.9mm, 31.6mm, 34.9mm
Internal cable routing only

150mm Travel Weight Sizes Note
150mm
603 grams(30.9mm)
30.9mm, 31.6mm, 34.9mm
Internal cable routing only

125mm Travel Weight Sizes Note
125mm
530 grams(30.9mm)
30.9mm, 31.6mm, 34.9mm
Internal cable routing only

170mm Travel Weight Sizes Note
170mm
636 grams(30.9mm)
30.9mm, 31.6mm, 34.9mm
Internal cable routing only



23

SEAT POSTS

MANIC TA Series

NEW FOR MY27

Full range dropper seat posts line with internal routing



100mm Travel Weight Sizes Note
100mm
416 grams(30.9mm)
27.2mm, 30.9mm, 31.6mm and 34.9mm
Internal cable routing only

200mm Travel Weight Sizes Note
200mm
595 grams(30.9mm)
30.9mm, 31.6mm and 34.9mm
Internal cable routing only

125mm Travel Weight Sizes Note
125mm
459 grams(30.9mm)
30.9mm, 31.6mm and 34.9mm
Internal cable routing only

215mm Travel Weight Sizes Note
215mm
623 grams(30.9mm)
30.9mm,31.6mm and 34.9mm
Internal cable routing only

150mm Travel Weight Sizes Note
150mm
521 grams(30.9mm)
30.9mm, 31.6mm and 34.9mm
Internal cable routing only

230mm Travel Weight Sizes Note
230mm
653 grams(30.9mm)
30.9mm,31.6mm and 34.9mm
Internal cable routing only

170mm Travel Weight Sizes Note
170mm
550 grams(30.9mm)
30.9mm, 31.6mm and 34.9mm
Internal cable routing only



24

SEAT POSTS

MANIC GRAVEL Series

50mm

Travel	50mm
Weight	420 grams
Sizes	27.2mm
Remote	New two ways control remote system




25

SEAT POSTS




Posts	Category	Insertion Depth 1	Length 2	Sizes	Travel
Manic 50mm	Gravel	100/110/120mm	315/350/380mm	27.2	50mm
Manic TA LC 100mm	XC/Trail	80mm	310mm	30.9/31.6/34.9	100mm
Manic TA LC 125mm	XC/Trail/AM	90mm	361mm	30.9/31.6/34.9	125mm
Manic TA LC 150mm	XC/Trail/AM	100mm	425mm	30.9/31.6/34.9	150mm
Manic TA LC 170mm	XC/Trail/AM	140mm	469mm	30.9/31.6/34.9	170mm
Manic TA 100mm	XC/Trail	110mm	350mm	27.2	100mm
Manic TA 100mm	XC/Trail	80mm	310mm	30.9/31.6/34.9	100mm
Manic TA 125mm	XC/Trail/AM	90mm	361mm	30.9/31.6/34.9	125mm
Manic TA 150mm	XC/Trail/AM	100mm	425mm	30.9/31.6/34.9	150mm
Manic TA 170mm	XC/Trail/AM	130mm	469mm	30.9/31.6/34.9	170mm
Manic TA 200mm	XC/Trail/AM	150mm	531mm	30.9/31.6/34.9	200mm
Manic TA 215mm	XC/Trail/AM	160mm	567mm	30.9/31.6/34.9	215mm
Manic TA 230mm	XC/Trail/AM	170mm	603mm	30.9/31.6/34.9	230mm

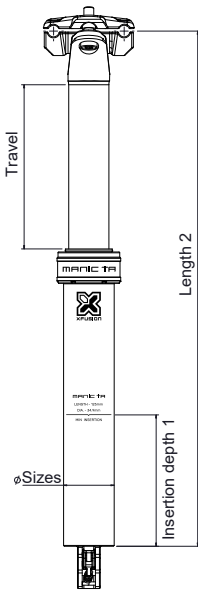

SEAT POST //


POSTS				
Family	MANIC GRAVEL	MANIC TA LC	MANIC TA	
Model	Manic 50mm	Manic TA LC	Manic TA 100mm	Manic TA 125/150/170/200/215/230mm
Category	Gravel	XC/Trail/AM	XC/Trail/AM	XC/Trail/AM
Travel	50mm Infinite Adjust	100, 125, 150, 170mm infinite adjust	100mm infinite adjust	125, 150, 170, 200,215,230mm infinite adjust
Weight Target	420g	497g(30.9/100mm), 530g(30.9/125mm), 603g(30.9/150mm), 636g(30.9/170mm)	416g(30.9)	459g(30.9/125mm),521g(30.9/150mm), 550g(30.9/170mm),595g(30.9/200mm) 623g(30.9/215mm),653g(30.9/230mm)
Outer Post Material	Aluminum	Aluminum	Aluminum	
Small Inner Shaft Material	Black Ano	Black Ano	Black Ano	
OD	27.2mm	30.9mm, 31.6mm, 34.9mm	27.2mm, 30.9mm, 31.6mm, 34.9mm	30.9mm, 31.6mm, 34.9mm
Color	Black	Black	Black	Black
Remote	New two ways control remote system			
Notes	Internal cable routing only	Internal cable routing only	Internal cable routing only	Internal cable routing only

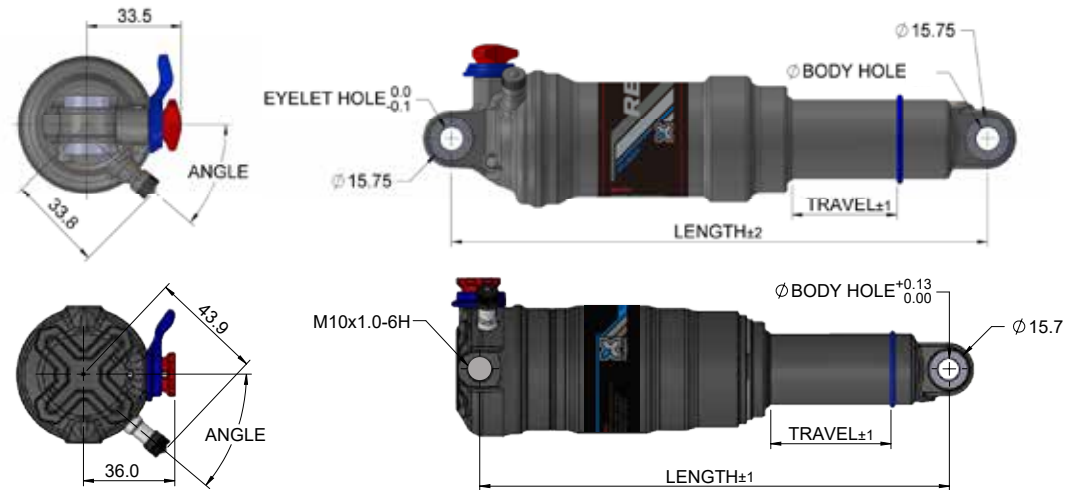

SHOCK //

SHOCKS												
Family	REZZA Series				O2 PRO Series				H3C Series		H3A Series	
Model	REZZA RL	REZZA RLX	REZZA RLR	REZZA RLXR	O2 PRO R	O2 PRO RL	O2 PRO RLX	O2 PRO RLR	RCP	HLR	RCP	HLR
Category	XC/Trail				XC/Trail/AM				XC/Trail/AM	DH	XC/Trail/AM	DH
Target Wt. Lbs/Grams	190(250g)				165(265g), 184 AV(297g)	165(265g), 184 AV(297g)	165(265g), 200 AV(300g)	165(265g), 200 AV(300g)	318g(w/o spring)	350g(w/o spring)	515g(w/o spring)	545g(w/o spring)
Spring	Air				Air				Coil		Air	
Adjustments	Rebound, Lockout	Rebound, 3 Positions Comp.	Rebound, Lockout	Rebound, 3 Positions Comp.	Rebound	Rebound, Lockout	Rebound, 3 Positions Comp.	Rebound, Lockout	3 Positions platform, LS comp, Rebound	HS comp, LS comp, Rebound	3 Positions platform, LS comp, Rebound	HS comp, LS comp, Rebound
Options												
Poly Hardware	Y	Y	Y	Y	Y	Y	Y	Y	Y		Y	
AV Sleeve					Y	Y	Y	Y				
Remote Lockout			Q Flip 2	Q Flip 2				Q Flip				

REAR SHOCK SIZE CHART								
Standard Mount			Metric Mount			Trunnion Mount		
Eye to Eye	Stroke	Model	Eye to Eye	Stroke	Model	Eye to Eye	Stroke	Model
165	38	O2 PRO	170	30/35	O2 PRO/REZZA	145	30/35	O2 PRO/REZZA
184	44	O2 PRO	190	40/45	O2 PRO/REZZA	165	40/45	O2 PRO/REZZA
190	51	O2 PRO	210	50/55	O2 PRO/H3C/H3A/REZZA	185	50/55	O2 PRO/H3C/H3A/REZZA
200	51	O2 PRO	230	60/65	O2 PRO/H3C/H3A	205	60/65	O2 PRO/H3C/H3A
200	56	O2 PRO	250	75	H3C / H3A	225	75	H3C / H3A
215	63	O2 PRO						

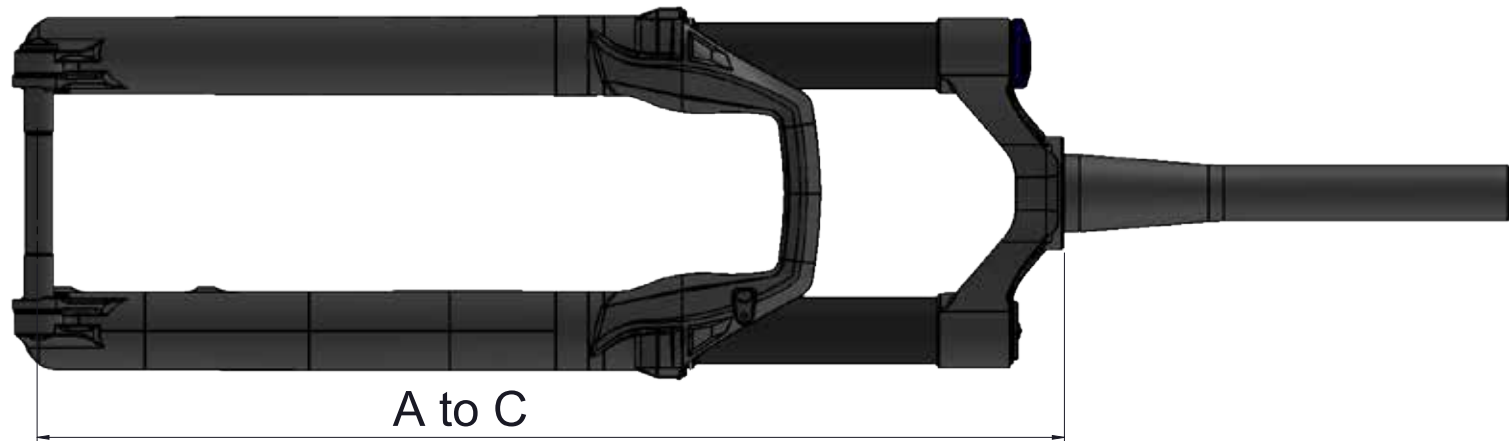

FORK TECH DOCUMENT

FORK TECH DOCUMENT

									1-1/8" ALUMINUM 1.5"-1-1/8" TAPER 9mm QR 15x100 15x110 20x110 12x100 Disc Mount Min Max									
26 Inch Forks	Category	Wheel Size	Stanchion	Spring	Travel	A to C	Max tire	Offset	Steerer		Axle Type					Style	Rotor Size	
SLANT	XC/Trail	26"	34mm	Air	100-160	546mm/160mm	62x705	40		v		v				180		
27.5 Inch Forks	Category	Wheel Size	Stanchion	Spring	Travel	A to C	Max Tire	Offset	Steerer		Axle Type					Style	Rotor Size	
Sweep Boost	XC/Trail	27.5"	34mm	Air	120-160	551mm/160mm	63x723	46		v			v			180		
29 Inch Forks	Category	Wheel Size	Stanchion	Spring	Travel	A to C	Max Tire	Offset	Steerer		Axle Type					Style	Rotor Size	
REZZA 29 Boost	XC/Trail	29"	34mm	Air	100~120	531mm/120mm	68x759	44		v			v			180	220	
SLIDE Boost	XC/Trail	29"	34mm	Air	100-140	551mm/140mm	68x760	44&51		v			v					
TRACE 36	Trail/AM/FR	29"	36mm	Air	140-170	581mm/170mm	68x760	44&51		v			v					
VENGEANCE 38	Trail/AM/FR	29"	38mm	Air	160-180	596mm/180mm	68x762	44&51		v			v					
RV1 38mm	AM/FR/DH	29"	38mm	Air	200	610mm/200mm	68x762	46&56	v					v				203

SUSPENSION REMOTE SEPC.

Remote Number	Remote type	Photo of remote MANIC	Material	FORK	SHOCK	SEAT POST	I-SPEC 2	I-SPEC EV	MMX
1	Q FLIP		AL	✓	✓				
2	Q FLIP 2		AL	✓	✓		✓	✓	✓
3	Q FLIP 3		AL	✓	✓	✓	✓	✓	✓

DROPPER REMOTE SEPC.

Remote Number	Remote type	Photo of remote MANIC	Material	Angle adjustable	MANIC	MANIC LC	MANIC GRAVEL	I-SPEC 2	I-SPEC EV	MMX
1	TYPE A+		AL	✓	✓	✓				
2	TYPE P+		Plastic	✓	✓	✓				
3	TYPE A		AL		✓	✓		✓	✓	✓
4	TYPE P		Plastic		✓	✓		✓	✓	✓
5	TYPE LC		Plastic		✓	✓				
6	TYPE GR		AL				✓			

UNITED STATES - OFFICIAL SERVICE CENTER
MAD SUSPENSION SERVICE INC
Tel: (775) 391-0783
E-Mail:service@madsuspension.com
add:4690 Longley Ave, Suite 22, Reno, Nevada,
89502
website:https://madsuspension.com/

UNITED STATES
Elvy Suspension
Tel: 775-285-7111
E-Mail service@elvysuspension.com
add 400 Mill ST #105 Reno, NV 89502
website https://elvysuspension.com/

EUROPEAN SERVICE HEADQUARTERS
LEMON SHOX
Tel:+49 911 27460066
Tel:mail@lemonshox.com
add:Schleifweg 53 90409 Nürnberg Germany
website:http://www.lemonshox.com/

ANDORRA
ASZ DISTRIBUTION
Tel:+34 652 73 53 83
E-Mail:pedidos@asz-distribucion.com
add:Inmaculada 25, lonja 6, trasera AsZ
Distribución, San Vicente de Baracaldo,
Spain
website:https://www.asz-distribucion.com/

ANDORRA
ORING SUSPENSION CENTER(SERVICE)
Tel:+34 947719014
Mobile:+34 722459002
E-Mail:Taller@oringsuspensiones.com
add:Calle Juan de Padilla N°6 Bajo 09006
Burgos
website:https://oringsuspensiones.com/

AUSTRALIA(EAST)
CW WORKS
Tel:0424 755 114
E-Mail:cwworksau@gmail.com
add:127 Amber Cres, Narre Warren VIC 3805
Australia
website:https://www.cwworks.com.au

AUSTRALIA(WEST)
RnR SUSPENSION SPECIALISTS
Tel:0428 263 668
E-Mail:rnrsuspensionspecialist@gmail.com
add:2/12 Laurence Road Walliston, Western
Australia 6076
website:https://www.rnrsuspensionspecialists.com/

UNITED STATES - OFFICIAL SERVICE CENTER
BELGIUM
VD SPORT IMPORT
Tel:+31 (0) 629321900
E-Mail:info@x-fusionshox.nl
add:Boterwijksestraat 11, 5688 HX Oirschot,
Netherlands
website:https://www.bikesuspension.nl/

BENELUX
VD SPORT IMPORT
Tel:+31 (0) 629321900
E-Mail:info@x-fusionshox.nl
add:Boterwijksestraat 11, 5688 HX Oirschot,
Netherlands
website:https://www.bikesuspension.nl/

BRAZIL
SCITEX IMP. COM. E SERV. LTDA.
Tel:tel (11) 5587-3662
E-Mail:Scitex@scitex.com.br
add:Rua Carneiro Da Cunha, 872 Sao Paulo,
SP-04144-001
website:www.scitex.com.br

CANADA (EAST)
S4 SUSPENSION
Tel:450-504-1148
E-Mail:gcaron@s4suspension.com
add:601 Rue Pasteur Unit 103, Saint-Jérôme,
QC J7Z 0E2 Canada
website:www.s4suspension.com

CANADA (WEST)
SUSPENSION WERX(SERVICE ONLY)
Tel:778-340-2013
E-Mail:info@suspensionwerx.com
add:1631 Welch St, North Vancouver, BC V7P 3G9 Canada
website:www.suspensionwerx.com

CHILE
BIKEPLANET CHILE(SALES)
Tel:+56-9-92261093
E-Mail:ventas@bikeplanet.cl
add:Lo Barnechea Santiago Chile
website:http://www.bikeplanet.cl/

CHINA
VOLARE
Tel:+86 0769 26981212
E-Mail:124428661@qq.com
add:2F,328 Tianxin Village Hongyuan Road Nancheng
District Dongguan City
website:https://www.volare.com.cn/

CZECH REPUBLIC
SPORT PORT(SERVICE)
Tel:+420 773 776 964
E-Mail:mancik@sportport.cz
add:K Borovému 101 Říčany 251 00
website:https://www.sportport.cz/en/uvod/

CZECH REPUBLIC
KG BIKE
Tel:+420 608 018 374
E-Mail:goabike@seznam.cz
add:Jaselská 1195/2 736 01 Havířov
website:https://www.sportport.cz/en/uvod/

FRANCE
EXACYCLE
Tel:+33 6 33 20 42 44
E-Mail:info@exacycle.com
add:254 Chem. des Vignes, 01500 Château-Gaillard,
France
website:https://www.exacycle.com/

FRANCE
ROYAL SUSPENSION
Tel:+33 6 98 91 30 48
E-Mail:arnaud@royalsuspension.com
add:54700 Pont-à-Mousson, France
website:http://www.royalsuspension.com

GERMANY
LEMON SHOX
Tel:+49 911 27460066
Tel:mail@lemonshox.com
add:Schleifweg 53 90409 Nürnberg Germany
website:http://www.lemonshox.com/

HUNGARY
MR-PROJEKT BIKES
Tel:+36 70 318 3178
E-Mail:info@mr-projekt.com
add:Debrecen, Jerikó u. 25, 4032, Hungary

INDONESIA
PT. WAHANA INTI UTAMA
Tel:+6221 8170178168
E-Mail:frans.suryadi@bab-indonesia.com
add:Jl. Alam Sutera Boulevard No.12a, Pakulonan,
Serpong, Kota Tangerang Selatan, Banten 15325, Indonesia

ITALY
SS38 BIKE LANA
Tel:+39 0473 491186
E-Mail:info@ss38-bike.it
add:Via Merano, 7, 39011 Lana BZ, Italy
website:https://www.mtb-suedtirol.com/

ISRAEL
RANOFUN
Tel:+972 4-952-2334
E-Mail:ranofun@gmail.com
add:Derech HaYam 3, Shavei Tzion, 2280600, Israel
website:https://www.ranofun.co.il/

JAPAN
GRAVITY LABS
Tel:+81 27-288-8177
E-Mail:gravitylab191s@gmail.com
add:421-4 Kogure, Fujimicho, Maebashi City, Gunma
Prefecture
371-0103
website:https://www.gravity-lab.com

KOREA
GS OUTDOOR
Tel:+82 070 8600 0846
E-Mail:gsoutdoor@naver.com
add:#301, Ace High Tech City Beomgye, 29, Simin-daero
109beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do,
14042
(Hogye-dong)
website:www.gsoutdoor.co.kr

LUXEMBURG
VD SPORT IMPORT
Tel:+31 (0) 629321900
E-Mail:info@x-fusionshox.nl
add:Boterwijksestraat 11, 5688 HX Oirschot, Netherlands
website:https://www.bikesuspension.nl/

MALAYSIA
SEN AIK TRADING
Tel:+60 3-3358 6650
E-Mail:yeann@senaik.com
add:12-3-1, Jalan Setia Prima Q U13/Q, Setia Alam, Sek. U13
Shah Alam, 40170 Shah Alam, Selangor, Malaysia
website:www.senaik.com

MEXICO
ELITE BIKE(SCOTT Bikes only)
Tel:+52 871 716 0795
E-Mail:alma.fraire@elitebike-mx.com
add:Blvrd Independencia 1199, San Isidro, 27100 Torreón, Coah.,
Mexico
website:http://www.elitebike.mx/

MEXICO
DOS BIKEXTORE(MAIN SERVICE CENTER)
Tel:+52 442 688 48 92
E-Mail:hola@bikextore.com
add:Avenida Prolongación Tecnológico 700, Local 1, Plaza
Fresnos, Colonia, Los Fresnos, 76150 Santiago de
Querétaro, Qro., Mexico
website:https://www.bikextore.com/

MEXICO
VELOCI BIKES
Tel:+52 33 3283 1160
E-Mail:hola@grupoveloci.com
add:Circuito Grijalba No. 50, Santa Cruz de las Flores, 45640
Tlajomulco de Zúñiga, Jal., Mexico
website:https://veloci.com.mx/

NETHERLANDS
VD SPORT IMPORT
Tel:+31 (0) 629321900
E-Mail:info@x-fusionshox.nl
add:Boterwijksestraat 11, 5688 HX Oirschot, Netherlands
website:https://www.bikesuspension.nl/

NEW ZEALAND
SHOCKCRAFT
Tel:+64 3 976 7790
E-Mail:sales@shockcraft.co.nz
add:58 Boundary Road, Alexandra 9320 NZ
website:https://www.shockcraft.co.nz/

PERU
STORM BIKE
Tel:+51 998 576 066
E-Mail:hola@stormbikes.com
add:Av. Emancipacion 835 interior 148 Lima, Perú
website:https://www.stormbikes.com.pe

PHILIPPINES
PEREGRINE MARKETING
Tel:+032 233 0352
E-Mail:sales@peregrinebike.com
add:E.O. Perez St. Subangdaku, North Reclamation, Mandaue
City, Cebu

PHILIPPINES
FAREN ENTERPRISES
Tel:09177730544
E-Mail:sam_estimo@yahoo.com
E-Mail:59-Bansalagin Street, Project 7, Quezon City,
Metro Manila

PHILIPPINES
CHEAB BICYCLE PARTS SUPPLY
Tel:+09774703626
E-Mail:realbikeshop@yahoo.com
add:104 QUEZON PIPI BOULEVARD Davao City
Philippines 8000
website:https://www.facebook.com/cheabicyclesupply

POLAND
SPIDER SUSPENSIONS
Tel:+48 513 323 323
E-Mail:biuro@spidersuspensions.com
add:1 Maja 251, 41-710 Ruda Śląska, Poland
website:https://spidersuspensions.com/

PORTUGAL
ORING SUSPENSION CENTER
Tel:+34 947719014
Mobile:+34 722459002
E-Mail:Taller@oringsuspensiones.com
add:Calle Juan de Padilla N°6 Bajo 09006 Burgos
website:https://oringsuspensiones.com/

PORTUGAL
ASZ DISTRIBUTION
Tel:+34 652 73 53 83
E-Mail:pedidos@asz-distribucion.com
add:Inmaculada 25, lonja 6, trasera AsZ
Distribución, San Vicente de Baracaldo, Spain
website:https://www.asz-distribucion.com/

RUSSIA
TEAMMANO CO.
Tel:+7 926 695 20 40
E-Mail:shop@teammano.ru
add:Moscow, Schelkovskoe shosse, 3, building 1 Hobby
shopping center, pavilion 003, -1st floor
website:https://teammano.ru/

SINGAPORE
CUSTOM BIKE CO.
Tel:+65 8822 0122
E-Mail:custombikecosg@gmail.com
add:2 Jalan Lokam, #01-02, Kensington Square,
Singapore 537846, (Along Upper Paya Lebar Road)
website:https://cbcsq.business.site/

SLOVENIA
COMTRON D.O.O.
Tel:+386 2 300 35 15
E-Mail:acono@comtron.si
add:Tržaška cesta 21, 2000 Maribor, Slovenia
website:https://econo.eu/

SPAIN
ORING SUSPENSION CENTER
Tel:+34 947719014
Mobile:+34 722459002
E-Mail:Taller@oringsuspensiones.com
add:Calle Juan de Padilla N°6 Bajo 09006 Burgos
website:https://oringsuspensiones.com/

SPAIN
ASZ DISTRIBUTION
Tel:+34 652 73 53 83
E-Mail:pedidos@asz-distribucion.com
add:Inmaculada 25, lonja 6, trasera AsZ
Distribución, San Vicente de Baracaldo, Spain
website:https://www.asz-distribucion.com/

SOUTH AFRICA
ROBBIE'S BICYCLE CONCEPT(SERVICE)
Tel:+27 41 110 0555
E-Mail:info@rbco.co.za
add:Unit 8, Moffett Business Centre, 104 Restitution
Road, Port Elizabeth
website:https://www.rbco.co.za/

SWITZERLAND
SUSPENSION CENTER
Tel:+41 31 809 30 20
E-Mail:info@scenter.ch
add:Gurnigelstrasse 11CH-3132 Riggisberg
website:https://suspensioncenter.ch/

SWEDEN
FSSUPPORT.SE
Tel:+46 70 849 3107
E-Mail:info@fssupport.se
add:Sandbacka 104, 444 94 Ucklum, Sweden
website:https://fssupport.se/

TAIWAN
IRON STABLE
Tel:04 2557 5422
E-Mail:contact@ironstable.com.tw
add:No. 260, Kuang-Cheng Lane, Nei-Tung Rd Houli Shiang,
Taichung Country
website:https://www.ironstable.com.tw/

THAILAND
RAJA CYCLE CO., LTD.
Tel:+66 2 026 6842
add:nyjfi 2 417 Tamru-Bang Phi Rd, Phraeksa, Mueang Samut
Prakan District, Samut Prakan 10280, Thailand
website:https://www.optima.bike/

TURKEY
KRON BISIKLET
Tel:444 68 10
E-Mail:info@kronbisiklet.com.tr
add:7. Cad. No:11, 34956 Tepeören Osb/Tuzla/Istanbul
website:https://www.kronbisiklet.com.tr/

UNITED KINGDOM
UPGRADE BIKES LTD
Tel:+44 1403 711611
E-Mail:Info@Upgradebikes.co.uk
add:Units A-B Star Road, Partridge Green, Horsham RH13 8RA, UK
website:https://www.upgradebikes.co.uk/

UNITED STATES
JBI BIKE
Tel:(305) 238-1866
add:11925 SW 128th St. Miami, FL 33186 USA
website:https://www.jbi.bike/site/

UNITED STATES
QUALITY BICYCLE PRODUCTS
Tel:+1 952 941 9391
E-Mail:sales@qbp.com
add:6400 W 105th Street Bloomington, MN 55438, USA
website:https://www.qbp.com/

UNITED STATES
BICYCLE TECHNOLOGIES INTERNATIONAL
Tel:(800) 558-8324
E-Mail:accounts@bti-usa.com
add:33 Velocity Way, Santa Fe, NM 87508, USA
website:https://www.bti-usa.com/

XFUSION is executing a low-carbon and green energy transformation strategy since **2015**

we are committing to produce
ECO-friendly products.



XFUSION
XFUSIONSHOX.COM



A-PRO TECH CO., LTD.

No. 100, Nanbei 1st Road, Dajia District,
Taichung City 437, Taiwan

TEL : +886 4 2688-6555

OE: OscarChen@aprotek.com.tw

AM: TiticHuang@aprotek.com.tw